



RACE WHERE YOU WANT...WHEN YOU WANT

VINTAGE SPORTSMAN

2026 RULES

This document contains proprietary information and is the property of
Independent Vintage Racing Association

I CHASSIS RULES:

- A. Must be 2000 Chassis or older; any chassis newer than 2000 will run as Modified.
- B. Fixed floor cross members, **NO** bolt-in or rubber mount.
- C. Torque arm floor slider must be in a fixed position. Clinch collars or tubing spacers on slider rails allowed.
- D. Rear radius rods must be attached at an equal location on the frame measured from the motor plate back.
- E. **NO** left side Panhard rod; **NO** J-bar; **NO** right side spring bar.
- F. **NO** in cockpit adjusters including but not limited to Panhard rod, front and back coil springs or torsion bars.
- G. Car weight to be a minimum of 2400 pounds including driver at completion of race.
- H. The rear frame length dimension, with the square in the car is to be 43" from the center of the axle tube to the back of the frame and body. This does not include the rear bumper pockets; modern frames may need to be shortened.
- I. Any steel main body shock (non) adjustable allowed with or without Schrader valves. Pro and AFCO non-adjustable are allowed.
- J. Shocks:
 - 1. Coil cars: One coil spring per corner; **NO** bind rubbers.
 - 2. **NO** bump stops or shock rubbers allowed.
- K. **NO** independent rear suspension.
- L. **NO** brake bias and right front shut off allowed.

II ENGINE:

- A. 4412 Holley 2BBL carburetor only. Stock Venturi checked with Go/No-Go gauge.
- B. **NO** aluminum heads or blocks; **NO** LS Chevrolet engines allowed.
- C. Fuel permitted is gasoline ONLY! **NO** Methanol.
- D. Mufflers are **MANDATORY**.
- E. **NO** traction control.

III TRANSMISSION:

- A. Driveshafts must be painted white.
- B. Driveshaft loop **MANDATORY**.
- C. **NO** titanium driveshafts.

IV REAR AXLE:

- A. **NO** titanium components.

V. BODY:

- A. Sides of the hood can be a maximum of 2" higher than the center of hood. Vintage fiberglass hood and nose allowed.
- B. **NO** modern fiberglass hood scoops or dash surround, i.e. TEO, Bicknell, Troyer, etc.
- C. Back bumper and scrub rails maximum of 2" outside of tires. Rear bumper 3" behind rear body.
- D. Racing harnesses/seatbelts are to be within expiration date imprinted on restraints.

Note: All IVRA cars in competition must retain a vintage appearance. Modern cars with the doors cut short and narrowed will not be allowed. Please review the body guidelines/dimensions from the 1991 Dirt Rule Book on the car sketches attached below.

VI WHEELS AND TIRES:

- A. 13-92 maximum tires; any make and tire compound may be used.


****RACEIVERS ARE MANDATORY****

TRANSPONDERS ARE HIGHLY RECOMMENDED

~ALL CARS, DRIVERS, PLUS CREW MEMBERS MUST MEET INDIVIDUAL TRACK SAFETY RULES AND POLICIES~

Questions: Contact Larry Ricci via Facebook Messenger,

Email: modracer32@gmail.com or cell (845) 532-1973

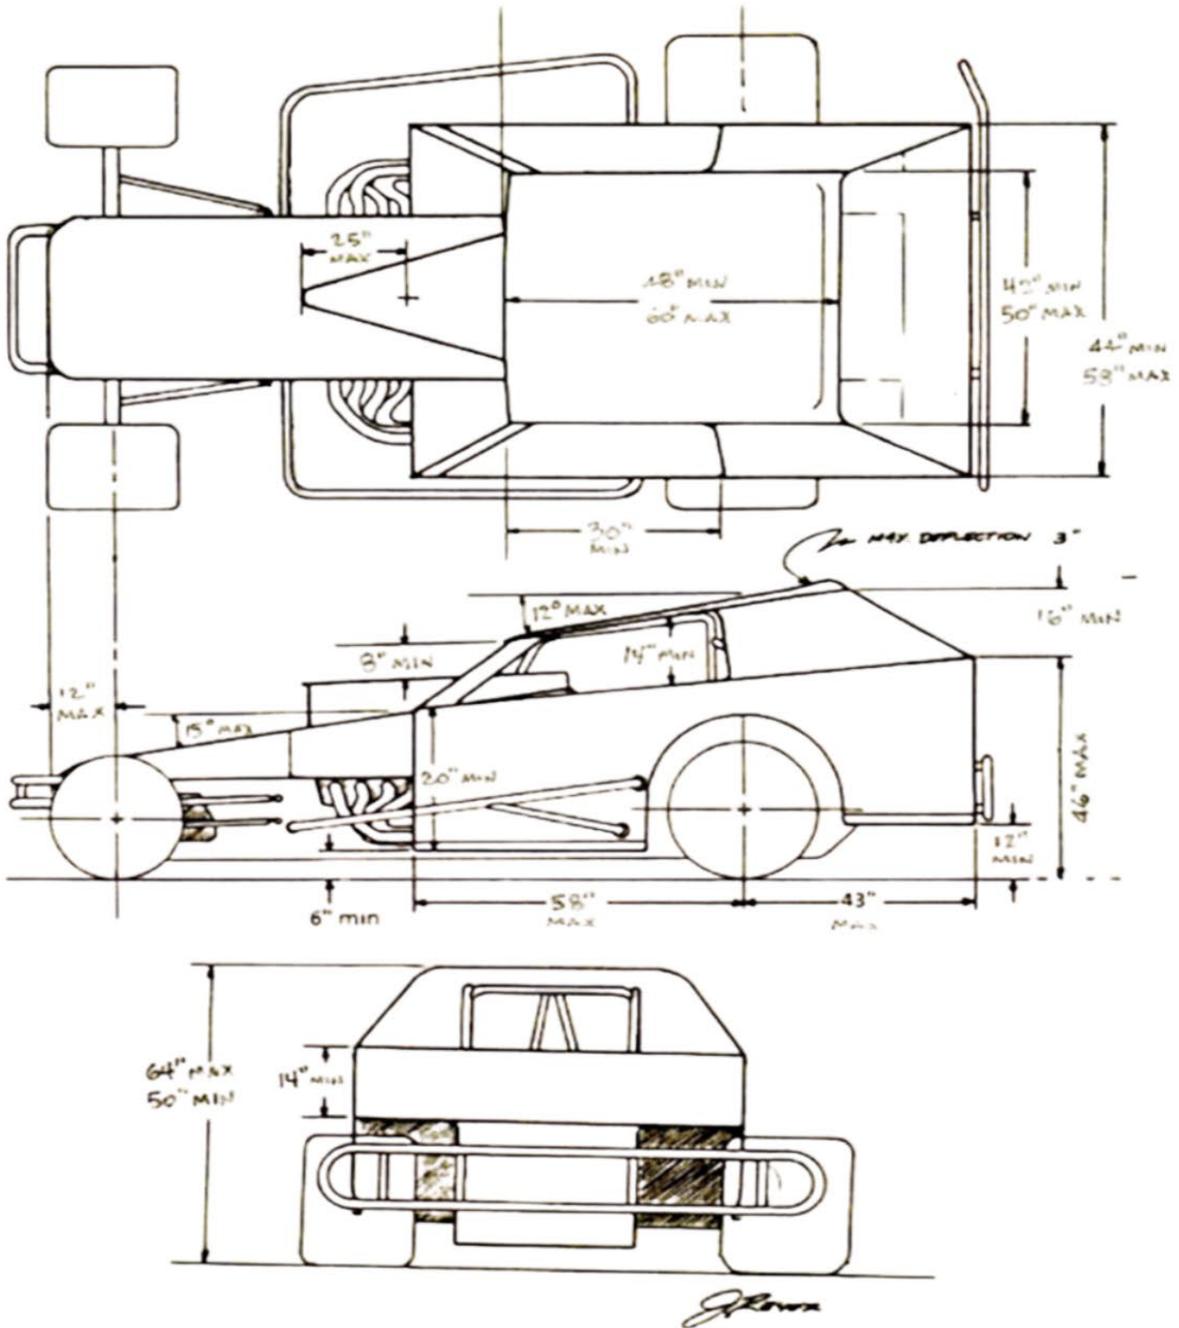

OLD STYLE BODY

(FROM 1991 D.I.R.T. RULE BOOK)

